

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 880 712 B1

7

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.12.2001 Bulletin 2001/49

(21) Application number: **96931145.5**

(22) Date of filing: **19.09.1996**

(51) Int Cl.7: **G01S 5/10, G01S 1/04**

(86) International application number:
PCT/GB96/02308

(87) International publication number:
WO 97/11384 (27.03.1997 Gazette 1997/14)

(54) POSITION DETERMINING SYSTEM SYSTEM ZUR POSITIONSBESTIMMUNG SYSTEME DE LOCALISATION

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU NL
PT SE**

(30) Priority: **19.09.1995 GB 9519087**

(43) Date of publication of application:
02.12.1998 Bulletin 1998/49

(60) Divisional application:
01105348.5 / 1 118 871

(73) Proprietor: **CAMBRIDGE POSITIONING
SYSTEMS LIMITED**
Cambridge CB1 2JB (GB)

(72) Inventors:
• **DUFFET-SMITH, Peter, James**
Cambridge CB4 4QS (GB)
• **GRAINGE, Keith, James, Bruno**
Winslow, Buckinghamshire MK18 3JJ (GB)

(74) Representative: **Brunner, Michael John**
GILL JENNINGS & EVERY,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)

(56) References cited:
EP-A- 0 303 371
EP-A- 0 444 738
WO-A-95/23981
EP-A- 0 318 685
EP-A- 0 647 076
US-A- 5 327 144

- **MRC MOBILE RADIO CONFERENCE 1991, NICE, FRANCE, 13-15 NOV. 1991, 1991, VALBONNE, FRANCE, SEE, FRANCE, pages 51-55, XP000391318 MOULY M ET AL: "The pseudo-synchronisation, a costless feature to obtain the gains of a synchronised cellular network"**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 880 712 B1

Description

[0001] This invention relates to a position determining system using radio or other broadcast transmissions. More particularly, it relates to a system using the Global System for Mobile Communications (GSM) or other digital trans-

[0002] In our European Patent EP-B-0303371 we describe a radio navigation and tracking system, now known as 'CURSOR', which uses the spatial coherence of the signals from several radio transmitters to determine the position of a roving receiver. Its principles are explained in the above patent specification where it is shown how the signals received directly by the roving receiver (rover) are compared with those received by a fixed base station whose location is known (base) to determine their *phase* difference, and hence the difference in range of the base and rover from each transmitter. Three such measurements made on independent transmitters are needed for navigation and tracking in two dimensions to fix the position of the rover relative to the base station and network of transmitters. The unknown quantities calculated for each new position are the spatial x and y co-ordinates of the rover together with the phase offset between the local oscillators in the equipment of the two receivers. A further patent specification, WO 94/28432, shows how the same principles may be applied in tunnels and other shielded spaces such as underground car parks. Duffett-Smith and Woan (Journal of Navigation, 45, 157, 1992) describe a particular implementation of the phase-measuring system in which the signals from three or more medium-wave AM public broadcast stations are used to track the position of a vehicle in and around Cambridge, UK. at speeds up to 110 km h⁻¹, with a precision of about 5 m. One of the advantages of such a system lies in the fact that no additional costly infrastructure of coherent radio transmitters needs to be set up for CURSOR operation. On the contrary, CURSOR is able to use the signals from any independent radio transmitters set up for any purpose.

[0003] EP-B-0 303 371 also explains how the wider bandwidth signals of modulated transmissions may be used to measure the *time* difference between the signals received from each transmitter at the base station and the rover. In this case, the position of the peak in the cross correlation can be used as an estimator of the time difference between the two received signals, and hence the difference in distance from the transmitter of the base and rover. As with the phase-measuring system, three such measurements made on three widely-spaced transmitters suffice to calculate the spatial x and y co-ordinates of the rover together with the time offset between the oscillators in the two receiving stations.

[0004] WO-A-95/23981 describes a hyperbolic location determining system using television broadcast signals in which the shifting of the synchronisation error (or time difference) between signals from pairs of transmitters is recorded, the information about the time difference of the signals transmitted by the pair(s) of transmitters being passed to the mobile receiver requiring a location fix.

[0005] Mobile telephones are increasingly using GSM and other digital techniques, and it would be an advantage to add time-measuring CURSOR positioning technology to provide additional services for users. However, signals radiated by digital telephone transmitters are complex and therefore there are problems to be overcome in attempting to combine the technologies.

[0006] According to the present invention there is provided a position determining system, for receiving broad band signals transmitted by a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored, the system comprising a pair of receiving stations, in use the first of the receiving stations being at a known position and the second being located on the roving object;

characterised in that

each of the receiving stations is arranged to receive the signals from the respective transmission sources substantially simultaneously, and record a portion of each of the received signals, and each receiving station including means for transmitting a link signal containing information about the recorded portions of the signals received from the transmission sources;

and by

a position determining processor arranged to receive the link signals and compare the information received from the one receiving station about the recorded portions of the signals received at the one receiving station from the transmission sources with the information received at the other receiving station about the recorded portions of the signals received at the other receiving station from the transmission sources, and to determine the time delay between the respective signal portions received at both receiving stations in order to determine the position of the roving object.

[0007] The receiving stations may receive the signals from the respective transmission sources sequentially and in the same sequence as each other.

[0008] The invention also includes a method of determining the position of a roving object, the method comprising transmitting a broadband signal from a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored; receiving the signals at a pair of receiving stations, in use a first of the receiving stations being at a known position and a second being located on the roving object, characterised in that

each of the receiving stations receives the signals from the respective transmission sources substantially simultaneously, records a portion of each of the received signals, and passes a link signal from to a position determining processor, the link signals containing information about the recorded portions of the signals received at the respective receiving station from the transmission sources; and
 5 the position determining processor compares the information received from the one receiving station about the recorded portions of the signals received at the one receiving station from the transmission sources with the information received from the other receiving station about the recorded portions of the signals received at the other receiving station from the transmission sources, and determines the time delay between the respective signals received at the receiving stations in order to determine the position of the roving object.

10 **[0009]** In some systems, each of the receiving stations is also arranged to receive a second signal from one or more of the transmitters, said second signal being used to enable compensation for changes in equipment offsets during receipt of the sequentially received signals.

[0010] The position determining processor may be co-located with one of the receiving stations or may be located
 15 remotely.

[0011] In one embodiment, the link signal from one of the receiving stations is passed to the other receiving station and from the other receiving station to the position determining processor.

[0012] Preferably, for locating purposes, a signal providing information about the position of the roving object is passed from the position determining processor to at least one of the receiving stations.

20 **[0013]** The system may further comprise one or more monitoring stations and a signal providing information about the position of the roving object may then be passed from the position determining processor to one or more of the monitoring stations.

[0014] To provide enhanced functionality, a database server may be connected to the position determining processor, the database server containing data elements relating to a plurality of known positions; and the system further comprises means for passing information about the position of the roving object determined by the position determining processor to the database server; means for retrieving data elements related to the position determined by the position determining processor; and means for passing the data elements to one of the receiving stations or to one or more of the monitoring stations.

[0015] The or each receiving station or the or each monitoring station preferably includes a display and the position of the roving object is displayed on the display which may be a dot matrix display.

30 **[0016]** The database server may contain graphical information and the graphical information is passed to a receiving station or monitoring station and displayed on the display to indicate the position of the roving object.

[0017] The transmission sources and receiving stations preferably comprise components of a digital cellular telephone network such as a GSM network. It is advantageous if the receiving stations monitor the strength of the signals of plural transmission sources and select a plurality of sufficiently strong signals for reception.

35 **[0018]** The quasi-synchronisation between the signals received from the respective transmission sources is preferably achieved by monitoring receipt of a specific portion of the transmitted signals, but may be achieved, alternatively, by means independent of the transmitted signals such as a local clock signal.

[0019] The system preferably includes a series of regionally, nationally, or even internationally networked fixed receiving stations to provide wide coverage and usage of the positioning system.

40 **[0020]** The receiving stations may be capable of receiving two or more channels simultaneously and it may be advantageous to repeat the reception of signals from plural transmission sources.

[0021] The description below sets out how the principles of the time-measuring CURSOR system may be applied to a digital radio network, such as the GSM telephone system, to enable the position of a receiver, such as a portable telephone handset, to be measured relative to the transmitter network. The equipment used in such a network already incorporates most of that required for position fixing operation, so that its implementation may be achieved with little extra cost. The precision of each position measurement is proportional (amongst other factors) to the inverse of the bandwidth of the signals; for a GSM single channel of 200 KHz bandwidth, the precision is about 50 m. Some improvement on this figure may be obtained in cases where more than three GSM transmitters can be received at both base
 50 and rover; they may all then be used in the position determining process.

[0022] The principles of operation of a position determining system according to the present invention, and a specific application to GSM technology, will now be described with reference to the accompanying drawings and included tables, in which:

55 Figure 1 is a diagram of the basic system elements;

Figure 2 is a diagram used to define the system co-ordinates;

Figure 3 illustrates calculation of cross correlation functions;

Figure 4 illustrates a GSM network incorporating the time-measuring technology of the invention, and identifies

the logical elements thereof;

Figure 5 illustrates the basic circuit components of a GSM handset;

Figure 6 illustrates a particular method of overcoming the effect of multipath propagation on measuring relative time delays;

Figure 7 (a, b, c) shows various different configurations of the elements in a GSM system incorporating the invention;

Figure 8 illustrates how position information may be displayed graphically on a small liquid crystal display;

Figure 9 illustrates the arrangement of elements and test sites in a trial carried out in Cambridge, UK;

Table 1 shows how the intrinsic measurement error varies with the signal to noise power ratio and the number of bits recorded; and

Table 2 gives some results from tests of a position determining system carried out in Cambridge, UK.

Principles of operation

[0023] Let us suppose that a transmitter, A, is broadcasting modulated radio signals within a band of frequencies of width $\Delta\nu$ centred on frequency ν_0 . The signals are received by a fixed base station, O, and a roving receiver, R, as shown in Figure 1. We define Cartesian co-ordinates (x, y) with respect to axes centred on the base station, as shown in Figure 2. The axes can have any orientation, but might conveniently be set so that the y-axis lies along the local mapping grid north-south direction. $\underline{a} = (a_x, a_y)$ is a vector which defines the position of the transmitter, and $\underline{r} = (x, y)$ defines the position of the rover. The vector $\underline{r} - \underline{a} = (x - a_x, y - a_y)$ completes the triangle OAR.

[0024] Transmitter A transmits signals continuously. At a prearranged moment the radio receivers in O and R begin receiving and recording a short length of the transmissions. This moment may for example be signalled by the arrival of a trigger transmitted from A, or a trigger derived from the normal signal traffic radiated by A, or a trigger generated locally. The last of these may be achieved, for example, by using a pulse of short duration derived from high-precision clocks at R and O which have been synchronised earlier. In a digital version of this application, the signals might first be converted from ν_0 to baseband, digitised, and then recorded in dynamic memory. Although O and R record as near simultaneously as possible, there will nevertheless be a time offset between the two records which is caused both by the difference in the distances AO and AR, and by the synchronisation error between the arrival of the trigger at O and R. Let Δt be this time offset; it is given by

$$\Delta t = \frac{[(x - a_x)^2 + (y - a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{\nu} + \epsilon$$

where ϵ is the synchronisation error and ν is the speed of the radio waves.

[0025] An estimate of Δt may be obtained from the cross correlation of the recordings made at O and R. In Figure 1 there are shown links, L1 and L2, which represent means of conveying representations of the recordings made at each receiving station to a position determining processor CPP. The nature of the links, whether they convey information in near real time or impose delays, is of no consequence in principle. All that matters is that duplicates of the recording made by each receiving station are assembled together at the position determining processor for comparison with each other.

[0026] The cross correlation of the two recordings is now performed by the position determining processor using any convenient means. In the case of digital signals, this may best be carried out by a microprocessor which calculates estimates of the function at discrete intervals of time offset, τ , corresponding to the sampling interval, t_s , as shown by the dots in Figure 3. It is unlikely that the peak of the function corresponds with a particular sample, so the microprocessor must also fit an interpolation function, shown by the dashed curve, in order to obtain the best estimate of the position of the peak. The value of τ corresponding to the peak is an estimator of Δt .

[0027] This process of quasi-simultaneous recording, conveyance over one or more links, assembly of copies at one place, and estimation of the value of Δt from the cross correlation, must be performed on at least two or three spatially distinct transmitters. If there are means at O and R of synchronising sufficiently accurately, then just two measurements would generally suffice; otherwise, if ϵ is unknown as is generally the case, at least three measurements are needed. Let A, B, and C be the three transmitters in the latter case, at vector positions $\underline{a} = (a_x, a_y)$, $\underline{b} = (b_x, b_y)$, and $\underline{c} = (c_x, c_y)$. Then the three measurements of Δt are given by

$$\Delta t_a = \frac{[(x - a_x)^2 + (y - a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{\nu} + \epsilon$$

$$\Delta t_b = \frac{[(x-b_x)^2 + (y-b_y)^2]^{\frac{1}{2}} - (b_x^2 + b_y^2)^{\frac{1}{2}}}{v} + e$$

5 and

$$\Delta t_c = \frac{[(x-c_x)^2 + (y-c_y)^2]^{\frac{1}{2}} - (c_x^2 + c_y^2)^{\frac{1}{2}}}{v} + e \quad (1)$$

10

[0028] These three non-linear equations can be solved to evaluate x , y , and e , and hence the position of the rover is determined. Actually, the solution of these three equations is generally ambiguous with two possible pairs of (x, y) . Often these are sufficiently far apart that it is obvious which is the correct result (for example, only one might lie within the triangle formed by the three transmitters), but if the ambiguity must be resolved automatically then an extra transmitter must be monitored.

15

[0029] The accuracy of the method depends on the error in the estimator of Δt derived from the cross correlation, and there are three main factors. First, the width of the cross correlation affects the accuracy of the result, since a wider function provides a less sharply-defined peak. The width is inversely proportional to the bandwidth, Δv , of the transmitted signals. Hence, wider bandwidth transmissions provide for more accurate intrinsic position determination. It should be noted here that the "bandwidth" could encompass all the signals radiated from a particular radio mast and not just one particular channel. For example, if ten adjacent channels of 200 KHz width each were active within a total bandwidth of 2 MHz, it may be possible, using a wide-band receiver or one which can receive simultaneously on more than one channel, to make use of all ten at once and thereby obtain the accuracy corresponding to a 2 MHz bandwidth. If some of the channels were inactive, it might nevertheless still be possible to obtain the full accuracy corresponding to the separation of the two channels furthest apart.

20

25

[0030] Secondly, the signal-to-noise power ratio, r , of the signals is important. Let us assume that we are recording one-bit samples of the received signals converted first to baseband. Each sample is a 'one' or a 'zero' depending on whether the signal is greater than or less than zero at the instant of sampling. We also assume that the signals are contained wholly within a uniform band of frequencies extending from zero to Δv , and that they are sampled at the Nyquist rate equal to $2\Delta v$. The error in the estimation of the position of the peak, $\Delta \tau$, is related to the average number, $q(r)$, of consecutive samples which contains just one error by the approximate expression

30

$$\Delta \tau = \frac{2\sqrt{q(r)-1}}{(q(r)-2)\Delta v\sqrt{N}}$$

35

where N is the total number of samples used in the cross correlation. The minimum value of q is 2 since even when there is no signal, the one-bit samples have an equal chance of being right as wrong. Here we have assumed that the cross correlation function is triangular in shape rather than the sinc-squared function expected for noise signals and square band-pass filters. An error of $\Delta \tau$ adds in quadratically as a position error, Δx , where $\Delta x = v \Delta \tau$. The relationship between $q(r)$ and r can be obtained from the following expressions on the assumption that the signals are noise-like:

40

$$q(r) = \frac{1}{P}$$

45

$$P = \sqrt{\frac{2}{\pi}} \int_{-\infty}^{\infty} Q(x\sqrt{r}) \exp(-\frac{x^2}{2}) dx$$

50

$$Q(a) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} \exp(-\frac{x^2}{2}) dx$$

55

[0031] With Δv set to 200 KHz, the results shown in Table 1 are obtained.

Table 1

| S/N Power Ratio r | q | $N = 1024$ $\Delta x/m$ | $N = 4096$ $\Delta x/m$ |
|------------------------|------|----------------------------|----------------------------|
| 0 | 2.0 | ∞ | ∞ |
| 1 | 4.0 | 81 | 41 |
| 2 | 5.1 | 61 | 31 |
| 3 | 6.0 | 52 | 26 |
| 4 | 6.8 | 47 | 24 |
| 6 | 8.1 | 41 | 20 |
| 10 | 10.3 | 34 | 17 |
| 30 | 17.4 | 25 | 12 |
| 100 | 31.5 | 18 | 9 |

[0032] As noted above, the errors on the measurements from each transmitter, say Δx_1 , Δx_2 , Δx_3 , must be added in quadrature with each other and with any other errors in the estimation of the position of the rover. It is interesting to note that quite good results can be obtained even in conditions of poor reception.

[0033] Thirdly, and usually the most important in practice, there is the error incurred by not having an accurate knowledge of the paths by which the signals reach the rover. Multipath propagation spreads out the cross correlation, making it harder to estimate the position of the peak. It may also result in a multi-peaked cross correlation with the desired peak having a lower amplitude than others. If all the signals arrive by indirect routes, there may be no peak at all corresponding to the line-of-sight propagation path. It should be noted, however, that multipath propagation always results in a delay of the signals compared to the direct path. Provided that the base station antenna is in the clear above the surrounding clutter so that it receives the most direct signals only, then delayed signals at the rover always appear to the later side of the peak of the cross correlation. (In these circumstances it is possible to alleviate the effects of the multipath propagation as explained later.) Having fitted an appropriate interpolation function to the discrete samples, it is important to choose the smallest value of τ at which there is a significant amount of signal as that value of Δt to be used in the calculation of the position, rather than the position of the peak itself.

Application to GSM

[0034] The signals radiated by the transmitters in a GSM network are complex. The flexibility and capacity built into its design are such as to render it difficult, if not impossible, to predict precisely how the allocated spectrum (near 900 MHz and 1800 MHz in Europe) will be used at any moment. The frequency band is split into a number of radio frequency (RF) channels of 200 KHz width, each of which carries frequency modulated (FM) signals divided in time into a sequence of frames. The basic unit is the so-called time division multiple access (TDMA) frame lasting 4.615 ms and further divided into 8 time slots. Each time slot carries 156.25 bits at a rate of 270 Kbits s⁻¹ and may represent a 'normal burst' of data and training bits, a 'frequency correction burst' of fixed pattern, a 'synchronisation burst' of data and synchronisation bits, or an 'access burst' with a synchronisation sequence and data. Each of these bursts also carries header, tail, and guard bits. How many of the time slots are being used at any moment in a given frame, and how many of the RF carriers are being broadcast from a given transmitter, depends on the way the system has been set up and on the amount of traffic at that moment. However, in the minimum case when all is quiet one of the RF carriers will always be alive, carrying the so-called broadcast control channel (BCCH; a logical channel), polling for handsets in its cell by broadcasting one access burst in every TDMA frame. We can therefore rely on there being at least one FM broadcast from each transmitter mast with a bandwidth of about 200 KHz, and this we can use for position location.

[0035] A regional GSM network incorporating a positioning system according to the present invention might be as shown in Figure 4. Here we see base receivers, hereinafter also referred to by the acronym CBU, labelled CBU_A, CBU_B, CBU_C etc., at every GSM transmitter A, B, C etc., able to receive not only the signals from their own local transmitters but also those from at least two other distant transmitters. We also see a number of handsets incorporating roving receivers, hereinafter also referred to using the acronym CRU, labelled CRU₁, CRU₂ etc., active in the region. It is important that these handsets can also receive the signals from the same set of distant transmitters as well as from the local transmitter. As noted above, it is not necessary to achieve a high signal-to-noise ratio for reception of the distant signals, but nevertheless the need to receive distant transmitters may limit the usefulness of this system in

rural areas where cells are very widely separated. Also shown in Figure 4 are the position determining processor (CPP) and a service provider database (SPD). This is a device which provides position-related data specific to a request by the user of the position determining system. For example, the user may need directions to find the railway station in an unfamiliar city. The position determining processor would compute the user's position and pass it to the service provider database together with the user's request. The database would respond with the required list of instructions. The configuration shown here, in which the position determining processor is a stand-alone remote unit, is just one of several possible configurations (see below). For example, the CPP and CRU might be combined together inside the handset so that position processing is carried out by the handset's own computer.

[0036] There needs to be established a trigger code which is broadcast periodically from each transmitter, probably within the BCCH logical channel. As noted above, this could be a special code set up within the existing GSM framework, or it might be a repeating element of the ordinary GSM signals themselves, such as the arrival of a frame number ending in three zeroes which occurs every 4 seconds. The arrival of the trigger code causes an active roving receiver (CRU) to begin the process of recording the signals from at least three transmitters. There may sometimes be a commercial advantage in making the trigger code unique to a particular operator, or even to a particular handset, thus providing one means of charging users for the position determining service. (There are of course many other possible ways of charging.) The trigger code also activates the recording mechanism in the base unit (CBU) attached to the GSM transmitter. Since most GSM handsets can receive only one RF channel at once, the order in which to record the distant signals must first have been established, for example by using cell broadcast or the short message service. We see below that it might also be necessary to record the local transmitter signals a second time in order to take account of drifts over the recording period. If 2048 samples are recorded for each of the two distant transmitters (1024 each of I and Q quadrature-phase signals), and 4096 samples for the local transmitter (two sets of 2048), the whole process can be completed within a few hundred ms including the time taken to switch between the channels and settle on each new frequency. The recordings made by the roving receiver (CRU) and base receiver (CBU) are then sent by any convenient means to the position determining processor (CPP). The roving receiver could use, for example, slots in the GSM signals, or it could set up a data transfer call. The base receiver would probably send its recordings by landline to a remote position determining processor. The processor receives and assembles in memory its own copies of the signals received by the base and roving receivers for correlation and position processing. It might also use other parameters of the signals recorded by the two receiving stations such as signal strengths.

[0037] Once the data have been assembled, the processor then performs the cross correlation analysis. Standard methods may be used, but a preferred method is described later which reduces the effects of multipath propagation. Having made estimates of Δt_a , Δt_b and Δt_c , the processor solves the equations to evaluate x and y . However, the need to receive the signals from the three transmitters sequentially introduces a complication in that the synchronisation error, ϵ , is changing all the time and is unlikely to be constant over the period of recording. We can model this error over short periods as an offset plus a linear slope, i.e.:

$$\epsilon = \epsilon_0 + \epsilon_1 t$$

where ϵ_0 and ϵ_1 are constants, and t is the time. We have a further unknown quantity to evaluate, ϵ_1 , and we can do this by recording the signals from the local transmitter again for a second time (at both base and rover). We now obtain four values of Δt made at sequential times t_1 , t_2 , t_3 , and t_4 , and equations (1) become:

$$\Delta t_a(t_1) = \frac{[(x-a_x)^2 + (y-a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \epsilon_0 + \epsilon_1 t_1$$

$$\Delta t_b(t_2) = \frac{[(x-b_x)^2 + (y-b_y)^2]^{1/2} - (b_x^2 + b_y^2)^{1/2}}{v} + \epsilon_0 + \epsilon_1 t_2$$

$$\Delta t_c(t_3) = \frac{[(x-c_x)^2 + (y-c_y)^2]^{1/2} - (c_x^2 + c_y^2)^{1/2}}{v} + \epsilon_0 + \epsilon_1 t_3$$

and

$$\Delta t_a(t_1) = \frac{[(x-a_x)^2 + (y-a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \varepsilon_0 + \varepsilon_1 t_1 \quad (2)$$

5 [0038] The first and last of these equations can be subtracted to give

$$\Delta t_a(t_4) - \Delta t_a(t_1) = \varepsilon_1(t_4 - t_1)$$

10 from which ε_1 can be found. Hence with four estimates of Δt equations (2) can be evaluated to recover x and y .

[0039] Handsets containing multi-channel receivers able to receive all three channels simultaneously do not need to repeat the recording of the signals from transmitter A since the rate of drift between the clocks (measured by ε_1) is then of no consequence and does not need to be determined. High-quality single-channel handsets may also be able to dispense with the repeated recording if the drift in the clock error is small enough to ignore.

15 [0040] As noted above, almost all the hardware elements needed inside a GSM handset for the purposes of the present invention exist already for normal GSM operation. Figure 5 illustrates a typical implementation. The RF signals in the region of 900 MHz or 1800 MHz are received by antenna 1, amplified in the RF amplifier 2, and filtered in the RF bandpass filter 3, before being mixed to the intermediate frequency, IF, in mixer 4 with a local oscillator signal LO_1 , generated by oscillator 5. LO_1 already incorporates the necessary channel switching ability. It is important for the present invention that its frequency is phase-locked to that of a master oscillator, MO, usually a crystal oscillator 6. This is also a requirement for normal GSM operation so it imposes no additional costs. The IF signals are amplified in amplifier 7, filtered by the bandpass filter 8, and converted to baseband in quadrature mixers 9 and 10 using the signal, LO_2 , from a second local oscillator 11. As with LO_1 , this second oscillator also needs to be phase-locked to the master oscillator. However, fine tuning (automatic frequency control, AFC) is often also incorporated into the loop which must be held constant during the recording process. Quadrature outputs are filtered by the lowpass filters 12 and 13, digitised in analogue-to-digital converters 14 and 15, and the bit streams labelled I and Q are produced. Position determination then just requires the microprocessor 16 to make recordings of the bit streams in dynamic ram 17 under the control of the program 18. There might be a need for some additional memory. The main modification to enable position determination is in the firmware program running on the microprocessor, and it might be necessary to upgrade the processor itself to a faster model. Similar equipment is needed in the base receiving station.

20 [0041] A commercially limiting element in a system according to the present invention is likely to be the means by which the signals recorded at the base and rover are transferred to the position determining processor for cross correlation. It is therefore important to reduce the number of bits transferred as much as possible. As noted above, one-bit sampling produces adequate results even under conditions of poor signal reception, and although slightly better accuracy can be obtained using, say, two-bit sampling, the increase in the link load is likely to be unattractive. Indeed, it is probably better to double the number of one-bit samples, and hence double the length of the sampling interval, than to use two-bit samples. It may also be necessary to measure both I and Q channels and to perform a complex cross correlation, since the base and rover signals are unlikely to be in phase with each other, and the crystal oscillators are not locked together. Let the quadrature bit streams at the rover (CRU) be represented by I and Q (see Figure 5, where

$$I = V_1(t) \cos(\theta_1)$$

45 and

$$Q = V_2(t) \sin(\theta_1)$$

50 where θ_1 is the phase of the signals, and $V_1(t)$, $V_2(t)$ are their amplitudes. The corresponding quantities recorded at the base (CBU) are

$$I' = V_1(t) \cos(\theta_2)$$

55 and

and

$$Q' = V_2(t) \sin(\theta_2)$$

The microprocessor must then compute four cross correlations corresponding to $I'I'$, QQ' , IQ' , and $I'Q$, and then seek the peak in the quantity ρ , where

$$\rho = \sqrt{(I'I' + QQ')^2 + (IQ' - I'Q)^2}$$

The phase difference, $\theta = \theta_1 - \theta_2$, can also be obtained from

$$\theta = \tan^{-1} \left\{ \frac{I'Q/Q'}{I'I' + QQ'} \right\}$$

and this can be used to take out the small frequency offset between the local oscillators in the base and rover so that longer integration is possible.

[0042] Equations (1) and (2) above show how estimates of the time delays, Δt , may be used to deduce the position (x, y) of the rover and the synchronisation error, ϵ , between the base and rover. Central to this process is the accuracy with which estimates of Δt can be obtained from the cross correlations. As noted above, the major limitation to the accuracy is likely to be caused by multipath propagation of the signals from the GSM transmitter to the rover. It is assumed that the antenna at the base has been installed high enough above surrounding clutter to ensure that multipath propagation is small enough to be ignored. In these circumstances, multipath propagation to the rover causes the cross correlation profile to be spread out towards longer delay times, since the most-direct signals arrive first. The preferred method for obtaining an estimate of Δt is based on using auto-correlations (ACF) of the base and rover signals as well as the cross-correlation (CCF) between them. We use the two auto-correlations to deduce the likely shape of the cross-correlation, and then fit that 'template' to the cross-correlation to obtain the best estimate of Δt .

[0043] The two auto-correlations, ACF_{CRU} and ACF_{CBU} , together with the cross correlation, CCF, may be obtained by any of the standard means (see for example in "Random Data: analysis and measurement procedures" by J. S. Bendat and A. G. Piersol, Wiley-Interscience, 1971); we prefer the methods which involve fast Fourier transforms. The ACF_{CBU} is a good estimate of the 'intrinsic' auto-correlation of the transmitted signals (negligible multipath effect) whilst the ACF_{CRU} is likely to be corrupted by multipath signals, i.e. signals delayed by more than about 30 m equivalent path. This is shown for a particular example in Figure 6, where trace A is ACF_{CBU} and B is ACF_{CRU} . We can see that multipath has given rise to secondary peaks in trace B which appear on both sides of the main peak since the auto-correlation is always symmetrical. The 'template' is constructed by taking the left-hand portion of ACF_{CBU} (i.e. the trace to the left of the central peak in A corresponding to the negative time axis) and joining it to the right-hand portion of ACF_{CRU} (i.e. the trace to the right of the central peak in B corresponding to the positive time axis). This is shown in Figure 6 trace C. The measured CCF is shown by trace D, and we can see that the template C reproduces the major features. The estimate of the time offset, Δt , is then obtained by fitting the template to the measured CCF using any standard method, allowing the amplitudes of the two halves of the template to be free parameters as well as Δt . The fitting procedure also produces a 'goodness of fit' parameter which may be used as a basis for rejection or inclusion of the data.

[0044] In cases where more than three GSM transmitters can be received at both base and rover, it may be an advantage to use them all in the position determining process, especially if one or more of the paths is substantially indirect. In such a case, the goodness of fit parameter can provide a weighting factor for each Δt to be used in evaluating the position.

[0045] GSM handsets incorporate multi-level Analogue-to-Digital Converters (ADCs) and use adaptive processing techniques in order to reduce the errors resulting from multipath propagation. It may therefore be possible to use the demodulated signals themselves for the cross correlation function rather than the raw I and Q data streams from the receivers, depending on the design of the handset. Such extra delay put in by the adaptive processing must be removed of course, and no amount of processing can allow for the unknown extra path length of a wholly-indirect signal, but the demodulated output may nevertheless be better for estimating time-delays than the pre-processed I and Q raw data streams. Shown in dotted outline in Figure 5 is an FM discriminator 19 (FMD). FM discrimination translates a frequency offset into a steady (DC) shift in the output, so quadrature signals (I and Q) are not needed, but are replaced by a single signal (J in Figure 5). This offers two further advantages in that (a) half as much data need be transferred over the links, and (b) it is unnecessary to adjust for the frequency offset at the position determining processor thus reducing the processor overhead.

[0046] As noted above, several different configurations of a position determining system according to the present invention are possible, depending on the relative locations of the GSM transmitters (often called Base Transceiver

Stations, BTSs), the roving receivers (CRUs), the base receivers (CBUs), the position determining processor (CPP), and a service provider database (SPD). Three configurations are illustrated in Figures 7a, 7b, and 7c, denoted A, B, and C. Each of these is further subdivided into two. Figure 7a shows configuration A in which the CPP and SPD are co-located at a position remote from both the CBU and CRU. This could be the case, for example, when one CPP/SPD combination serves an entire region. In A1 each BTS has a CBU co-located with it. In A2 the CBU serving the local cell embraced by the three BTS is shown somewhere within the cell. Configurations B1 and B2 (Figure 7b) are similar to A1 and A2 respectively except that there are now many CPPs. In B1 each BTS has a CBU attached to it; in B2 each triangle of three BTSs has a CPP within it of which just one is shown in the Figure. The regional SPD remains at a remote location. Configurations C1 and C2 (Figure 7c) are similar to A1 and A2 but with the position processing carried out within each handset. Other configurations are also possible, each having relative advantages making them suited to particular commercial applications.

[0047] In some commercial applications, it may be an advantage to display map information in graphical form as part of the response of the service provider database to a request for a position-related service. An example of this is given in Figure 8 where it is shown how a map of the local area might be displayed on a screen attached to the position determining processor or at a monitoring station. The user has requested directions to a location marked by a filled circle labelled Z, and the position determining processor has computed the user's position to be somewhere within the filled circle labelled W. The user's handset includes a liquid crystal dot-matrix display which can display small portions of the larger map as well as character-based information. The first screen displayed on the handset might be as shown in the panel marked (a) in Figure 8. This is a large scale map of the local area with the circle, radius 100 m, centred on the calculated position. The roads are marked 1, 2, 3 etc., corresponding to the names indicated on the second screen, panel (b). The user can scroll back and forth between screens at will. Panel (c) shows a larger scale map of the local area, together with a pointer, K, which indicates the direction of the target destination, Z. Clearly, many other screens of information are possible, including one giving the address of the target destination, local traffic conditions, approximate distance, etc. In a commercial application, there might also be scope for a limited amount of advertising on the handset display.

Tests of prototype system

[0048] A prototype test apparatus using a pair of standard hand portable units and some additional recording equipment was set up in Cambridge, UK. The base station (CBU) was in a three-storey building near the city centre (see Figure 9) with the antenna fixed on the roof. The roving receiver (CRU) was carried in a car to various locations in the south of the city as shown by the crosses in Figure 9. Three GSM transmitters (BTSs) were used in the trial, located respectively in the city centre, at Great Shelford to the south, and at Fulbourn to the south east. Table 2 gives the mean positional errors in both co-ordinates, i.e. the differences between the averages of about 10 independent position determinations and the true positions as measured on a map. Simple data analysis techniques were used with no special discrimination against the effects of multipath propagation. The inherent accuracy of the apparatus, found from tests with both base receiver and roving receiver side-by-side on the bench, was less than 20 m rms. Tests numbers 1 to 6 were performed with the rover stationary; tests 7-11 were made at speeds between 40 and 64 km h⁻¹.

Table 2:

| Location number | Mean error East (m) | Mean error North (m) |
|-----------------|---------------------|----------------------|
| 1 | 66.5 | -59.5 |
| 2 | -5.5 | 80.0 |
| 3 | -68.0 | -15.0 |
| 4 | 89.0 | 90.0 |
| 5 | -19.0 | 41.0 |
| 6 | 64.0 | 79.0 |
| 7 | -73.0 | 6.0 |
| 8 | -62.0 | 59.0 |
| 9 | 17.0 | 128.0 |
| 10 | 43.0 | 31.0 |
| 11 | 95.0 | 105.0 |

Claims

1. A position determining system, for receiving broadband signals transmitted by a number of transmission sources (BTS) equal at least to the number of dimensions in which the movement of a roving object (R) is to be monitored, the system comprising a pair of receiving stations, in use the first of the receiving stations (CBU) being at a known position and the second (CRU) being located on the roving object;
characterised in that
each of the receiving stations (CBU, CRU) is arranged to receive the signals from the respective transmission sources (BTS) substantially simultaneously, and record a portion of each of the received signals, and each receiving station including means for transmitting a link signal (L_1 , L_2) containing information about the recorded portions of the signals received from the transmission sources;
and by
a position determining processor (CPP) arranged to receive the link signals (L_1 , L_2) and compare the information received from the one receiving station about the recorded portions of the signals received at the one receiving station from the transmission sources with the information received at the other receiving station about the recorded portions of the signals received at the other receiving station from the transmission sources, and to determine the time delay between the respective signal portions received at both receiving stations in order to determine the position of the roving object (R).
2. A position determining system according to claim 1 in which the receiving stations (CRU, CBU) may receive the signals from the respective transmission sources (BTS) sequentially and in the same sequence as each other.
3. A position determining system according to claim 1 or claim 2, wherein each of the receiving stations (CRU, CBU) is also arranged to receive a second signal from one or more of the transmission sources (BTS).
4. A position determining system according to any of claims 1 to 3, wherein the position determining processor (CPP) is co-located with one of the receiving stations (CBU).
5. A position determining system according to claim 4, wherein the link signal from one of the receiving stations (CRU) is passed to the other receiving station (CBU) and from the other receiving station to the position determining processor (CPP).
6. A position determining system according to any of claims 1 to 3, wherein the position determining processor (CPP) is located remote from the receiving stations (CBU, CRU).
7. A position determining system according to any of claims 1 to 6, wherein a signal providing information about the position of the roving object (R) is passed from the position determining processor (CPP) to at least one of the receiving stations (CBU, CRU).
8. A position determining system according to any of claims 1 to 7, further comprising a monitoring station and wherein a signal providing information about the position of the roving object is passed from the position determining processor (CPP) to the monitoring station.
9. A position determining system according to any of claims 1 to 8, further comprising
a database server (SPD) connected to said position determining processor (CPP), said database server containing data elements relating to a plurality of known positions;
means for passing information about the position of the roving object (R) determined by the position determining processor (CPP) to the database server (SPD);
means for retrieving data elements related to the position determined by the position determining processor (CPP); and
means for passing the data elements to one of the receiving stations (CBU, CRU) or to the monitoring station.
10. A position determining system according to any of claims 1 to 9, wherein the or each receiving station (CBU, CRU) or the monitoring station includes a display and the position of the roving object (R) is displayed on the display.
11. A position determining system according to claim 10, wherein the display comprises a dot matrix display.

12. A position determining system according to claim 10 or claim 11 when dependent on claim 9, wherein the database server (SPD) contains graphical information and said graphical information is passed to the receiving station (CBU, CRU) or monitoring station and displayed on the display to indicate the position of the roving object (R).
13. A position determining system according to any of the preceding claims, wherein the transmission sources (BTS) and receiving stations (CBU, CRU) comprise components of a digital cellular telephone network.
14. A position determining system according to claim 13, wherein the digital cellular telephone network is a GSM network.
15. A position determining system according to any of the preceding claims, wherein the receiving stations (CBU, CRU) monitor the strength of the signals of plural transmission sources (BTS) and select a plurality of sufficiently strong signals for reception.
16. A position determining system according to any of claims 1 to 15, wherein the quasi-synchronisation between the signals received from the respective transmission sources is achieved by monitoring receipt of a specific portion of the transmitted signals.
17. A position determining system according to claim 15 wherein the quasi-synchronisation between the signals received from the respective transmission sources is achieved by means independent of the transmitted signals.
18. A method of determining the position of a roving object (R), the method comprising transmitting broadband signals from a number of transmission sources (BTS) equal at least to the number of dimensions in which the movement of the roving object is to be monitored; receiving the signals at a pair of receiving stations (CBU, CRU), in use the first (CBU) of the receiving stations being at a known position and the second (CRU) being located on the roving object (R),
characterised in that
each of the receiving stations (CBU, CRU) receives the signals from the respective transmission sources (BTS) substantially simultaneously, records a portion of each of the received signals, and passes a link signal (L₁, L₂) from each of the receiving stations to a position determining processor (CPP), the link signals containing information about the recorded portions of the signals received at the respective receiving station from the transmission sources; and
the position determining processor (CPP) compares the information received from the one receiving station (CRU) about the recorded portions of the signals received at the one receiving station from the transmission sources (BTS) with the information received from the other receiving station (CBU) about the recorded portions of the signals received at the other receiving station from the transmission sources, and determines the time delay between the respective signals received at the receiving stations in order to determine the position of the roving object.
19. A method according to claim 18, wherein the broadband signals are digital cellular telephone network transmission signals.

Patentansprüche

1. Positionsbestimmungssystem zum Empfangen von Breitbandsignalen, die von einer Anzahl Übertragungsquellen (BTS) gleich mindestens der Anzahl an Dimensionen, in denen die Bewegung eines wandernden Objekts (R) zu überwachen ist, übertragen werden, wobei das System ein Paar Empfangsstationen aufweist, wobei im Einsatz die erste der Empfangsstationen (CBU) an einer bekannten Position ist und die zweite (CRU) sich auf dem wandernden Objekt befindet,
dadurch gekennzeichnet, daß
jede der Empfangsstationen (CBU, CRU) zum im wesentlichen gleichzeitigen Empfangen der Signale von den jeweiligen Übertragungsquellen (BTS) und zum Aufzeichnen eines Abschnitts jedes der empfangenen Signale angeordnet ist und jede Empfangsstation Mittel zum Übertragen eines Verknüpfungssignals (L₁, L₂) aufweist, das Informationen über die aufgezeichneten Abschnitte der Signale, die von den Übertragungsquellen empfangen werden, enthält,
und durch

einen Positionsbestimmungsprozessor (CPP), der hergerichtet ist zum Empfangen der Verknüpfungssignale (L_1 , L_2) und zum Vergleichen der Informationen, die von der einen Empfangsstation aus über die aufgezeichneten Abschnitte der Signale empfangen wurden, die an der einen Empfangsstation von den Übertragungsquellen aus empfangen werden, mit den Informationen, die an der anderen Empfangsstation über die aufgezeichneten Abschnitte der Signale empfangen werden, die an der anderen Empfangsstation von den Übertragungsquellen empfangen wurden, und zum Bestimmen der Zeitverzögerung zwischen den jeweiligen Signalabschnitten, die an beiden Empfangsstationen empfangen werden, um die Position des wandernden Objekts (R) zu bestimmen.

2. Positionsbestimmungssystem nach Anspruch 1, bei dem die Empfangsstationen (CRU, CBU) die Signale von den jeweiligen Übertragungsquellen (BTS) sequentiell und miteinander in derselben Sequenz empfangen können.
3. Positionsbestimmungssystem nach Anspruch 1 oder Anspruch 2, bei dem jede der Empfangsstationen (CRU, CBU) auch zum Empfangen eines zweiten Signals von einer oder mehreren der Übertragungsquellen (BTS) hergerichtet ist.
4. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 3, bei dem der Positionsbestimmungsprozessor (CPP) zusammen mit einer der Empfangsstationen (CBU) angeordnet ist.
5. Positionsbestimmungssystem nach Anspruch 4, bei dem das Verknüpfungssignal von einer der Empfangsstationen (CRU) aus zu der anderen Empfangsstation (CBU) und von der anderen Empfangsstation aus zu dem Positionsbestimmungsprozessor (CPP) geleitet wird.
6. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 3, bei dem der Positionsbestimmungsprozessor (CPP) entfernt von den Empfangsstationen (CBU, CRU) angeordnet ist.
7. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 6, bei dem ein Signal, das Informationen über die Position des wandernden Objektes (R) liefert, von dem Positionsbestimmungsprozessor (CPP) aus zu mindestens einer der Empfangsstationen (CBU, CRU) geleitet wird.
8. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 7, außerdem eine Überwachungsstation aufweist und bei dem ein Signal, das Informationen über die Position des wandernden Objektes liefert, von dem Positionsbestimmungsprozessor (CPP) aus zu der Überwachungsstation geleitet wird.
9. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 8, außerdem aufweisend
 - einen Datenbasis-Server (SPD), der mit dem Positionsbestimmungsprozessor (CPP) verbunden ist, welcher Datenbasis-Server Datenelemente enthält, die sich auf eine Mehrzahl bekannter Positionen beziehen,
 - Mittel zum Leiten von Informationen über die Position des wandernden Objektes (R), die von dem Positionsbestimmungsprozessor (CPP) bestimmt wird, zu dem Datenbasis-Server (SPD),
 - Mittel zum Wiedergewinnen von Datenelementen, die sich auf die Position beziehen, die von dem Positionsbestimmungsprozessor (CPP) bestimmt ist, und
 - Mittel zum Leiten der Datenelemente zu einer der Empfangsstationen (CBU, CRU) oder der Überwachungsstation.
10. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 9, bei dem die oder jede Empfangsstation (CBU, CRU) oder die Überwachungsstation eine Anzeige umfaßt und die Position des wandernden Objektes (R) auf der Anzeige angezeigt wird.
11. Positionsbestimmungssystem nach Anspruch 10, bei dem die Anzeige eine Punktmatrixanzeige aufweist.
12. Positionsbestimmungssystem nach Anspruch 10 oder Anspruch 11, sofern abhängig von Anspruch 9, bei dem der Datenbasis-Server (SPD) grafische Informationen enthält und besagte grafische Informationen zu der Empfangsstation (CBU, CRU) oder der Überwachungsstation geleitet und auf der Anzeige angezeigt werden, um die Position des wandernden Objektes (R) anzugeben.

13. Positionsbestimmungssystem nach irgendeinem der vorhergehenden Ansprüche, bei dem die Übertragungsquellen (BTS) und die Empfangsstationen (CBU, CRU) Komponenten eines digitalen Zellulartelefonnetzwerkes aufweisen.
14. Positionsbestimmungssystem nach Anspruch 13, bei dem das digitale Zellulartelefonnetzwerk ein GSM-Netzwerk ist.
15. Positionsbestimmungssystem nach irgendeinem der vorhergehenden Ansprüche, bei dem die Empfangsstationen (CBU, CRU) die Stärke der Signale mehrerer Übertragungsquellen (BTS) überwachen und eine Mehrzahl ausreichend starker Signale für einen Empfang auswählen.
16. Positionsbestimmungssystem nach irgendeinem der Ansprüche 1 bis 15, bei dem die Quasi-Synchronisation zwischen den Signalen, die von den jeweiligen Übertragungsquellen aus empfangen werden, erreicht wird durch Überwachen des Empfangs eines bestimmten Abschnitts der übertragenen Signale.
17. Positionsbestimmungssystem nach Anspruch 15, bei dem die Quasi-Synchronisation zwischen den Signalen, die von den jeweiligen Übertragungsquellen aus empfangen werden, durch Mittel erreicht wird, die unabhängig von den übertragenen Signalen sind.
18. Verfahren zum Bestimmen der Position eines wandernden Objektes (R), welches Verfahren das Übertragen von Breitbandsignalen von einer Anzahl Übertragungsquellen (BTS) gleich mindestens der Anzahl an Dimensionen, in denen die Bewegung des wandernden Objektes zu überwachen ist, aus, das Empfangen der Signale an einem Paar Empfangsstationen (CBU, CRU) umfaßt, wobei im Einsatz die erste (CBU) der Empfangsstationen an einer bekannten Position und die zweite (CRU) auf dem wandernden Objekt (R) ist, dadurch gekennzeichnet, daß
 - jede der Empfangsstationen (CBU, CRU) die Signale von den jeweiligen Übertragungsquellen (BTS) aus im wesentlichen gleichzeitig empfängt, einen Abschnitt von jedem der empfangenen Signale aufzeichnet und ein Verknüpfungssignal (L_1 , L_2) von jeder der Empfangsstationen aus zu einem Positionsbestimmungsprozessor (CPP) leitet, wobei die Verknüpfungssignale Informationen über die aufgezeichneten Abschnitte der Signale enthalten, die an der jeweiligen Empfangsstation von den Übertragungsquellen aus empfangen werden, und
 - der Positionsbestimmungsprozessor (CPP) die Informationen, die von der einen Empfangsstation (CRU) aus über die aufgezeichneten Abschnitte der Signale empfangen werden, die an der einen Empfangsstation von den Übertragungsquellen (BTS) aus empfangen wurden, mit den Informationen vergleicht, die von der anderen Empfangsstation (CBU) über die aufgezeichneten Abschnitte der Signale empfangen werden, die an der anderen Empfangsstation von den Übertragungsquellen aus empfangen werden, und die Zeitverzögerung zwischen den jeweiligen Signalen bestimmt, die an den Empfangsstationen empfangen werden, um die Position des wandernden Objektes zu bestimmen.
19. Verfahren nach Anspruch 18, bei dem die Breitbandsignale digitale Zellulartelefonnetzwerk-Übertragungssignale sind.

Revendications

1. Système de détermination de position pour recevoir des signaux large bande qui sont émis par un certain nombre de sources d'émission (BTS) selon un nombre égal au moins au nombre de dimensions selon lesquelles le déplacement d'un objet à mobilité aléatoire (R) doit être surveillé, le système comprenant une paire de stations de réception, et en utilisation, la première des stations de réception (CBU) est en une position connue et la seconde (CRU) est située sur l'objet à mobilité aléatoire, caractérisé en ce que :
 - chacune des stations de réception (CBU, CRU) est agencée pour recevoir les signaux en provenance des sources d'émission respectives (BTS) sensiblement simultanément et pour enregistrer une partie de chacun des signaux reçus, et chaque station de réception inclut un moyen pour transmettre un signal de liaison (L_1 , L_2) qui contient une information concernant les parties enregistrées des signaux reçus depuis les sources d'émission ; et par :

un processeur de détermination de position (CPP) qui est agencé pour recevoir les signaux de liaison (L_1 , L_2) et pour comparer l'information reçue depuis l'une des stations de réception en ce qui concerne les parties enregistrées des signaux qui sont reçues au niveau de l'une des stations de réception depuis les sources d'émission à l'information qui est reçue au niveau de l'autre station de réception en ce qui concerne les parties enregistrées des signaux qui sont reçues au niveau de l'autre station de réception depuis les sources d'émission, et pour déterminer le retard temporel entre les parties de signal respectives qui sont reçues au niveau des deux stations de réception afin de déterminer la position de l'objet à mobilité aléatoire (R).

2. Système de détermination de position selon la revendication 1, dans lequel les stations de réception (CRU, CBU) peuvent recevoir les signaux en provenance des sources d'émission respectives (BTS) séquentiellement et selon la même séquence l'une par rapport à l'autre.
3. Système de détermination de position selon la revendication 1 ou 2, dans lequel chacune des stations de réception (CRU, CBU) est également agencée pour recevoir un second signal en provenance d'une ou plus des sources d'émission (BTS).
4. Système de détermination de position selon l'une quelconque des revendications 1 à 3, dans lequel le processeur de détermination de position (CPP) est co-situé avec l'une des stations de réception (CBU).
5. Système de détermination de position selon la revendication 4, dans lequel le signal de liaison en provenance de l'une des stations de réception (CRU) est passé à l'autre station de réception (CBU) et depuis l'autre station de réception, au processeur de détermination de position (CPP).
6. Système de détermination de position selon l'une quelconque des revendications 1 à 3, dans lequel le processeur de détermination de position (CPP) est situé à distance des stations de réception (CBU, CRU).
7. Système de détermination de position selon l'une quelconque des revendications 1 à 6, dans lequel un signal fournissant une information concernant la position de l'objet à mobilité aléatoire (R) est passé depuis le processeur de détermination de position (CPP) à au moins l'une des stations de réception (CBU, CRU).
8. Système de détermination de position selon l'une quelconque des revendications 1 à 7, comprenant en outre une station de surveillance et dans lequel un signal qui fournit une information concernant la position de l'objet à mobilité aléatoire est passé depuis le processeur de détermination de position (CPP) à la station de surveillance.
9. Système de détermination de position selon l'une quelconque des revendications 1 à 8, comprenant en outre :
 - un serveur de base de données (SPD) qui est connecté audit processeur de détermination de position (CPP), ledit serveur de base de données contenant des éléments de données se rapportant à une pluralité de positions connues ;
 - un moyen pour passer une information concernant la position de l'objet à mobilité aléatoire (R) qui est déterminée par le processeur de détermination de position (CPP) au serveur de base de données (SPD) ;
 - un moyen pour retrouver des éléments de données rapportés à la position qui est déterminée par le processeur de détermination de position (CPP) ; et
 - un moyen pour passer les éléments de données à l'une des stations de réception (CBU, CRU) ou à la station de surveillance.
10. Système de détermination de position selon l'une quelconque des revendications 1 à 9, dans lequel la station de réception ou chaque station de réception (CBU, CRU) ou la station de surveillance inclut un affichage et la position de l'objet à mobilité aléatoire (R) est affichée sur l'affichage.
11. Système de détermination de position selon la revendication 10, dans lequel l'affichage comprend un affichage matriciel à points.
12. Système de détermination de position selon la revendication 10 ou 11 lorsqu'elle dépend de la revendication 9, dans lequel le serveur de base de données (SPD) contient une information graphique et ladite information graphique est passée à la station de réception (CBU, CRU) ou à la station de surveillance et est affichée sur l'affichage afin d'indiquer la position de l'objet à mobilité aléatoire (R).

13. Système de détermination de position selon l'une quelconque des revendications précédentes, dans lequel les sources d'émission (BTS) et les stations de réception (CBU, CRU) comprennent des composants d'un réseau de téléphone cellulaire numérique.
14. Système de détermination de position selon la revendication 13, dans lequel le réseau de téléphone cellulaire numérique est un réseau GSM.
15. Système de détermination de position selon l'une quelconque des revendications précédentes, dans lequel les stations de réception (CBU, CRU) surveillent l'intensité des signaux de plusieurs sources d'émission (BTS) et sélectionnent une pluralité de signaux suffisamment forts pour une réception.
16. Système de détermination de position selon l'une quelconque des revendications 1 à 15, dans lequel la quasi-synchronisation entre les signaux qui sont reçus depuis les sources d'émission respectives est réalisée en surveillant la réception d'une partie spécifique des signaux émis.
17. Système de détermination de position selon la revendication 15, dans lequel la quasi-synchronisation entre les signaux qui sont reçus depuis les sources d'émission respectives est réalisée à l'aide d'un moyen qui est indépendant des signaux émis.
18. Procédé de détermination de la position d'un objet à mobilité aléatoire (R), le procédé comprenant l'émission de signaux large bande depuis un certain nombre de sources d'émission (BTS) en un nombre égal au moins au nombre de dimensions selon lesquelles le déplacement d'un objet à mobilité aléatoire (R) doit être surveillé ; la réception des signaux au niveau d'une paire de stations de réception (CBU, CRU), et en utilisation, la première des stations de réception (CBU) est en une position connue et la seconde (CRU) est située sur l'objet à mobilité aléatoire (R) ;
caractérisé en ce que :
chacune des stations de réception (CBU, CRU) reçoit les signaux en provenance des sources d'émission respectives (BTS) sensiblement simultanément, enregistre une partie de chacun des signaux reçus et passe un signal de liaison (L_1 , L_2) depuis chacune des stations de réception sur un processeur de détermination de position (CPP), les signaux de liaison contenant une information concernant les parties enregistrées des signaux reçues au niveau de la station de réception respective depuis les sources d'émission ; et en ce que :
le processeur de détermination de position (CPP) compare l'information reçue depuis l'une (CRU) des stations de réception en ce qui concerne les parties enregistrées des signaux qui sont reçues au niveau de l'une des stations de réception depuis les sources d'émission (BTS) à l'information qui est reçue au niveau de l'autre station de réception (CBU) en ce qui concerne les parties enregistrées des signaux qui sont reçues au niveau de l'autre station de réception depuis les sources d'émission, et détermine le retard temporel entre les parties de signal respectives qui sont reçues au niveau des stations de réception afin de déterminer la position de l'objet à mobilité aléatoire.
19. Procédé selon la revendication 18, dans lequel les signaux large bande sont des signaux de transmission de réseau de téléphone cellulaire numérique.

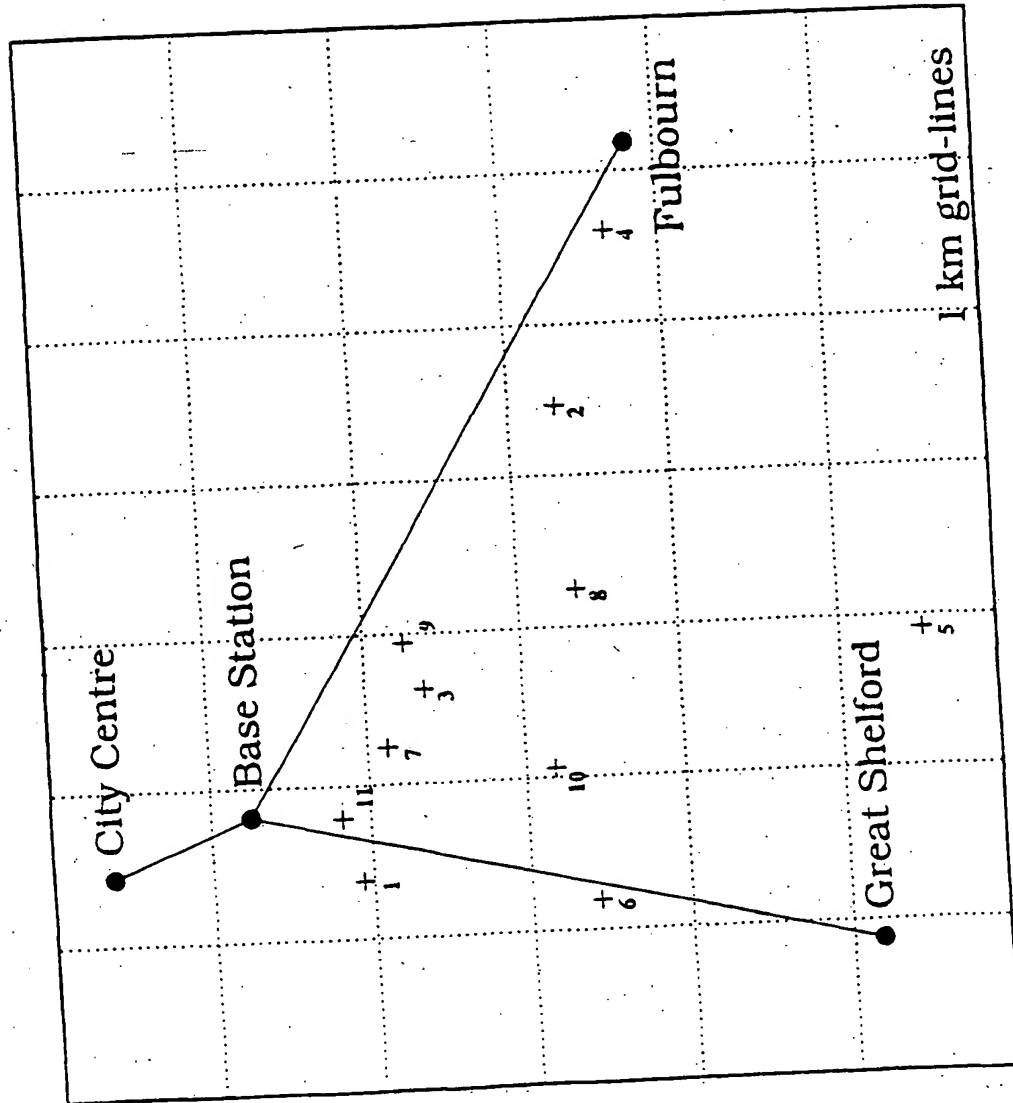


Figure 9

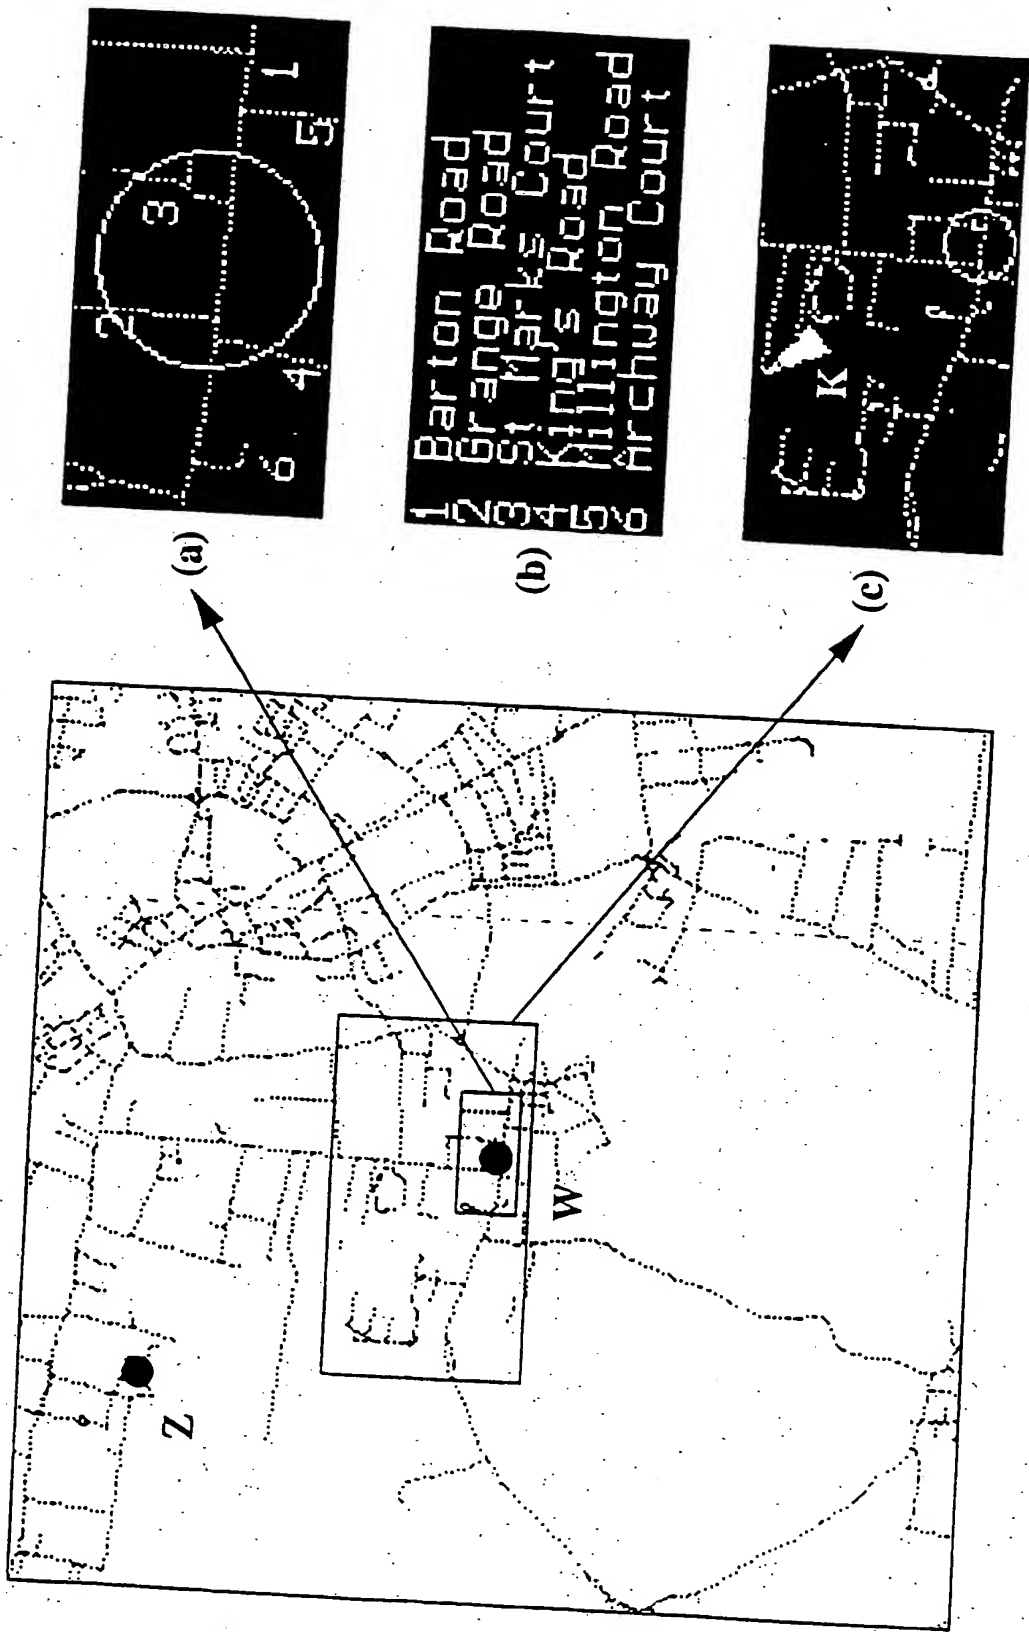


Figure 8

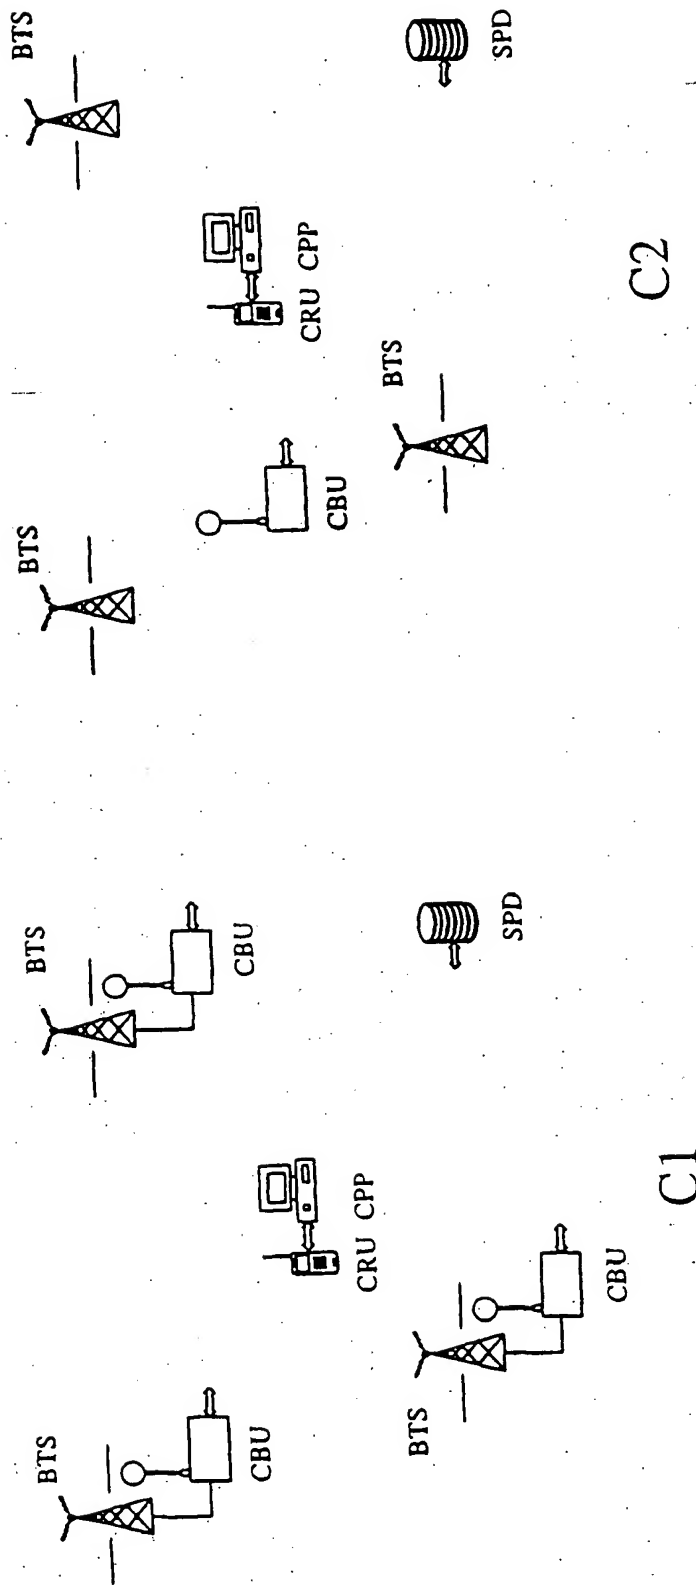


Figure 7(c)

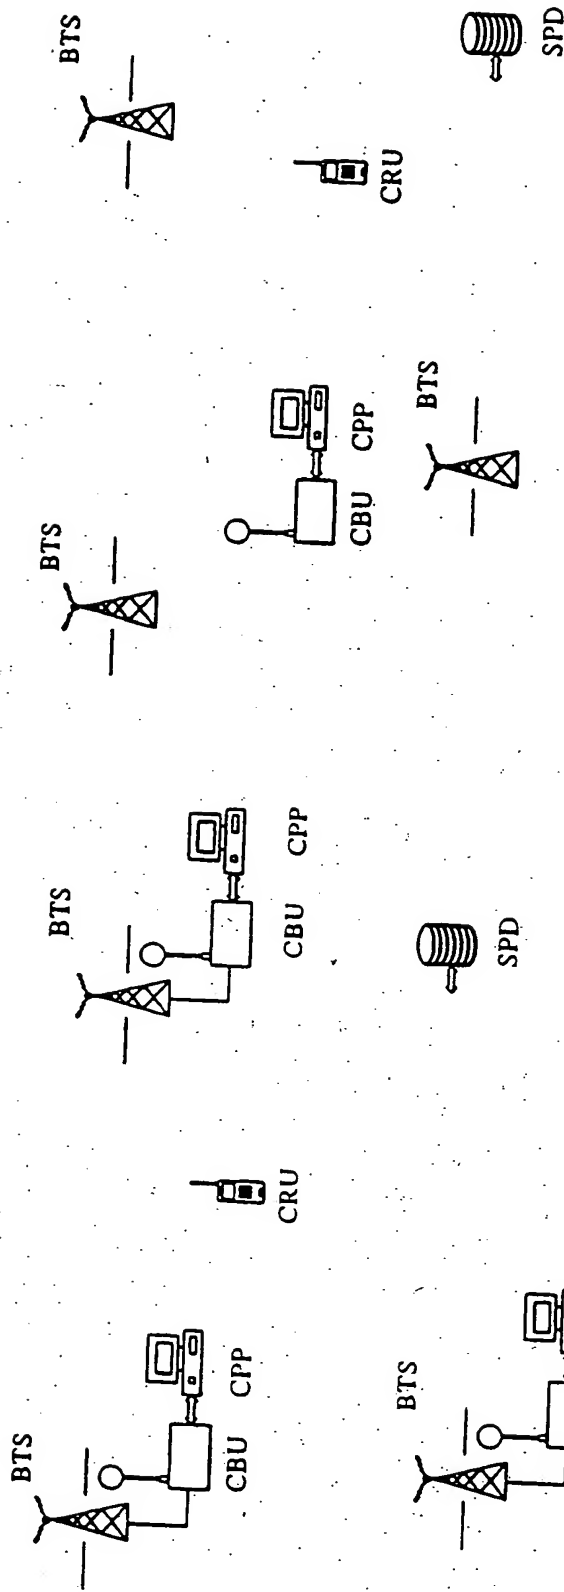


Figure 7(b)

B1

B2

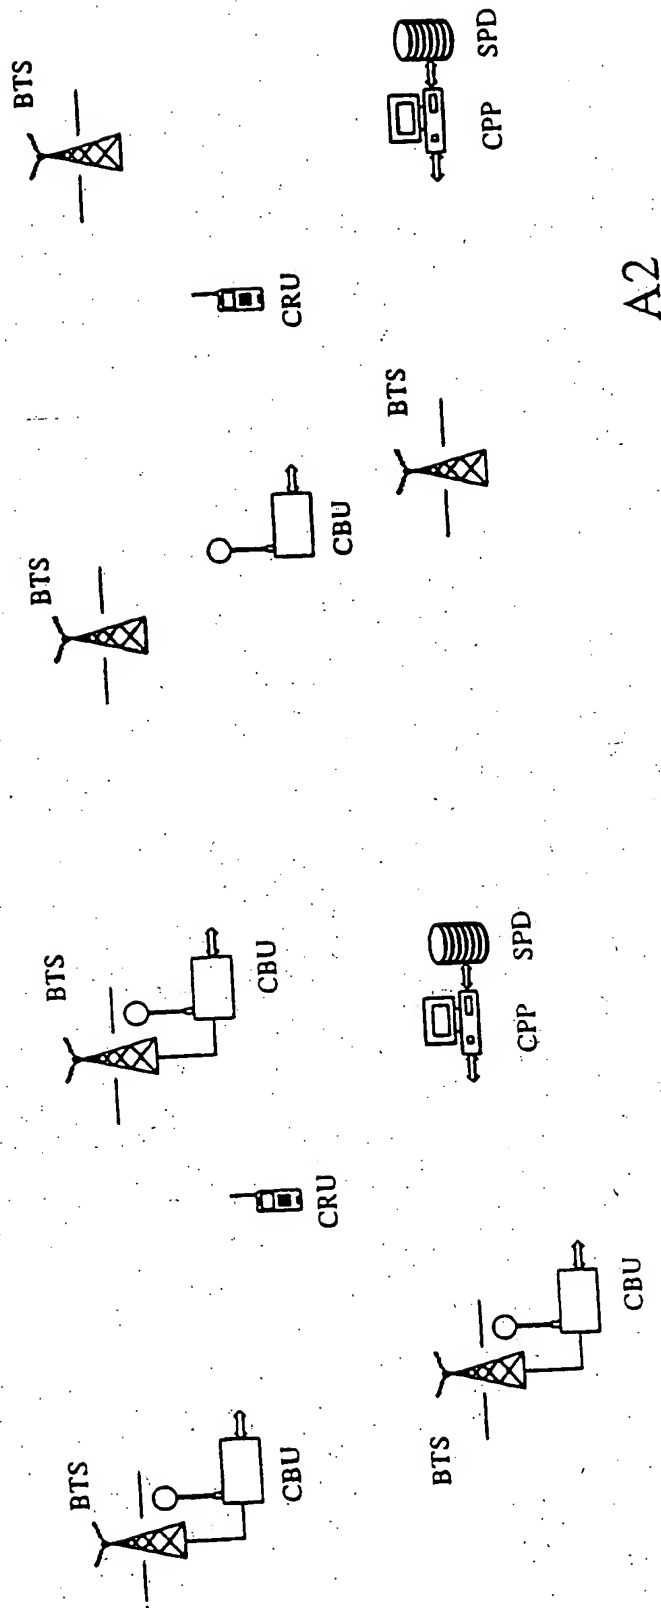


Figure 7(a)

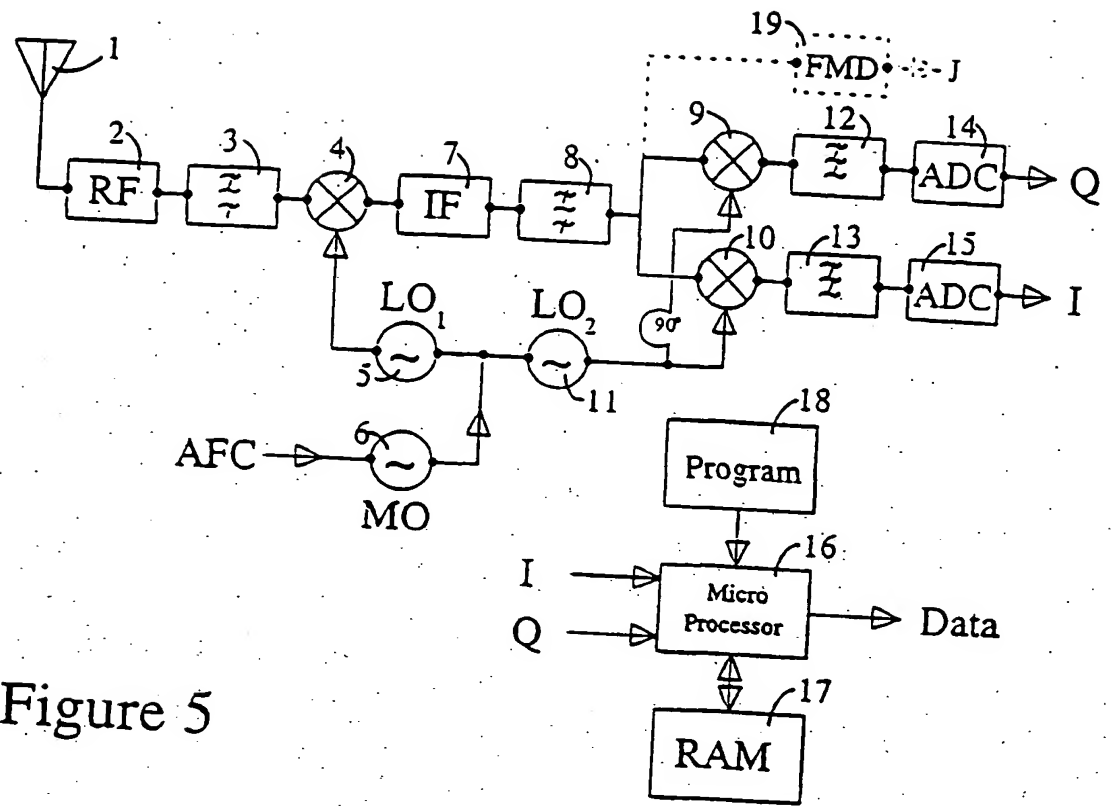


Figure 5

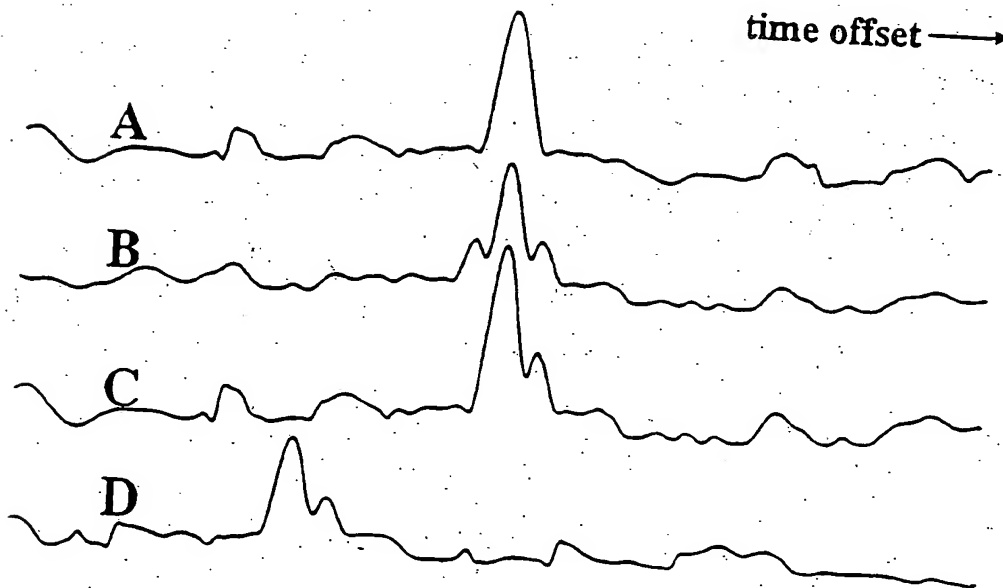


Figure 6

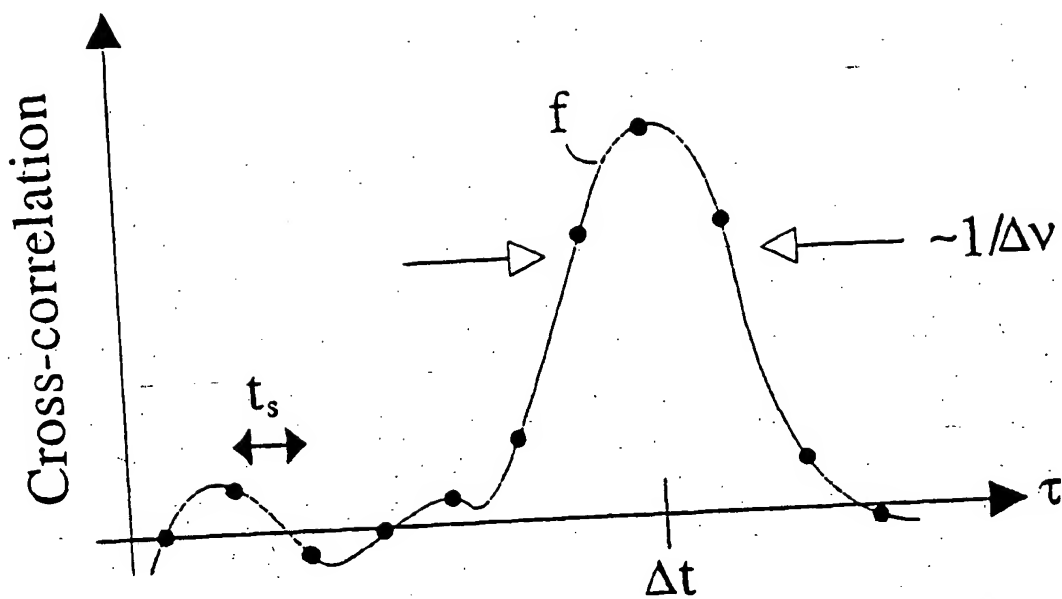


Figure 3

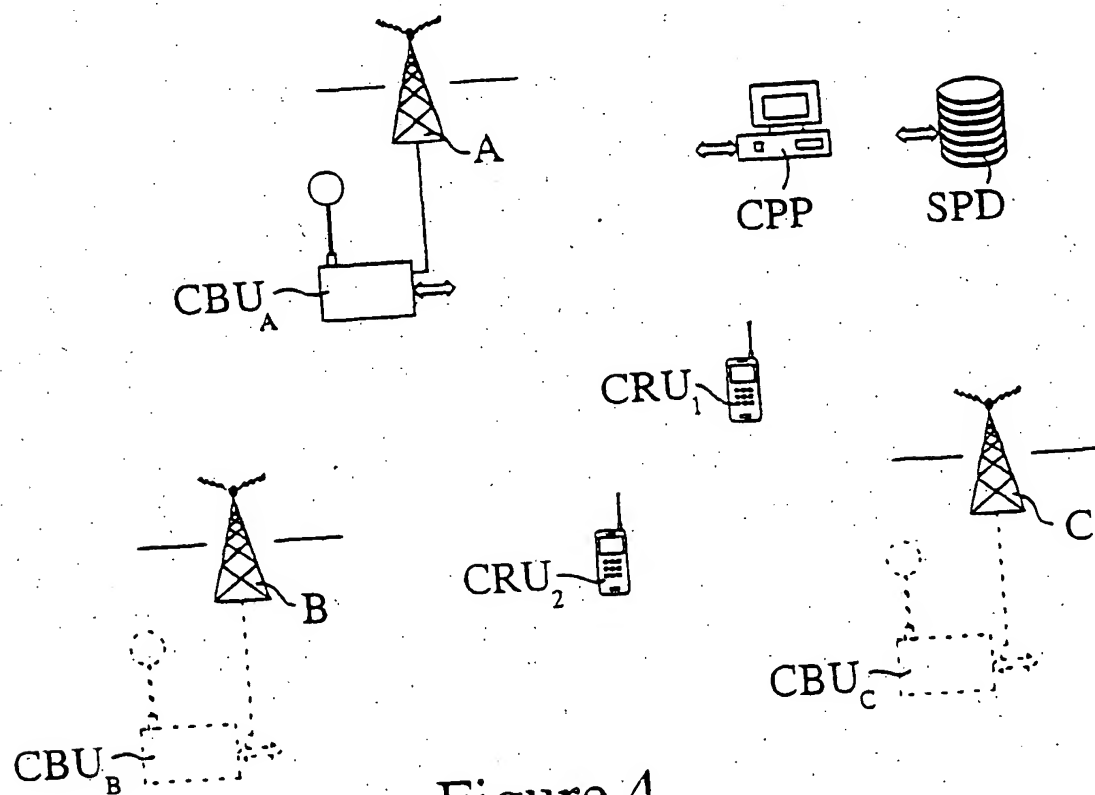


Figure 4

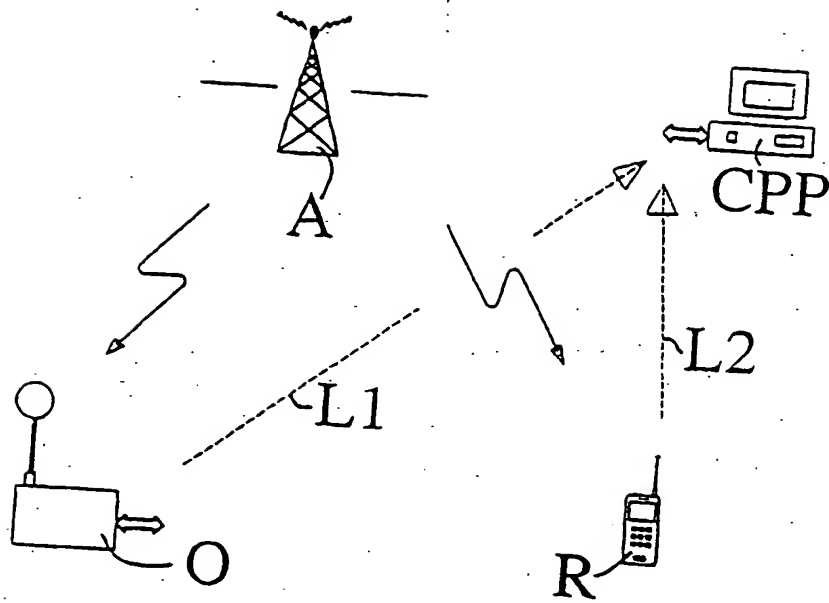


Figure 1

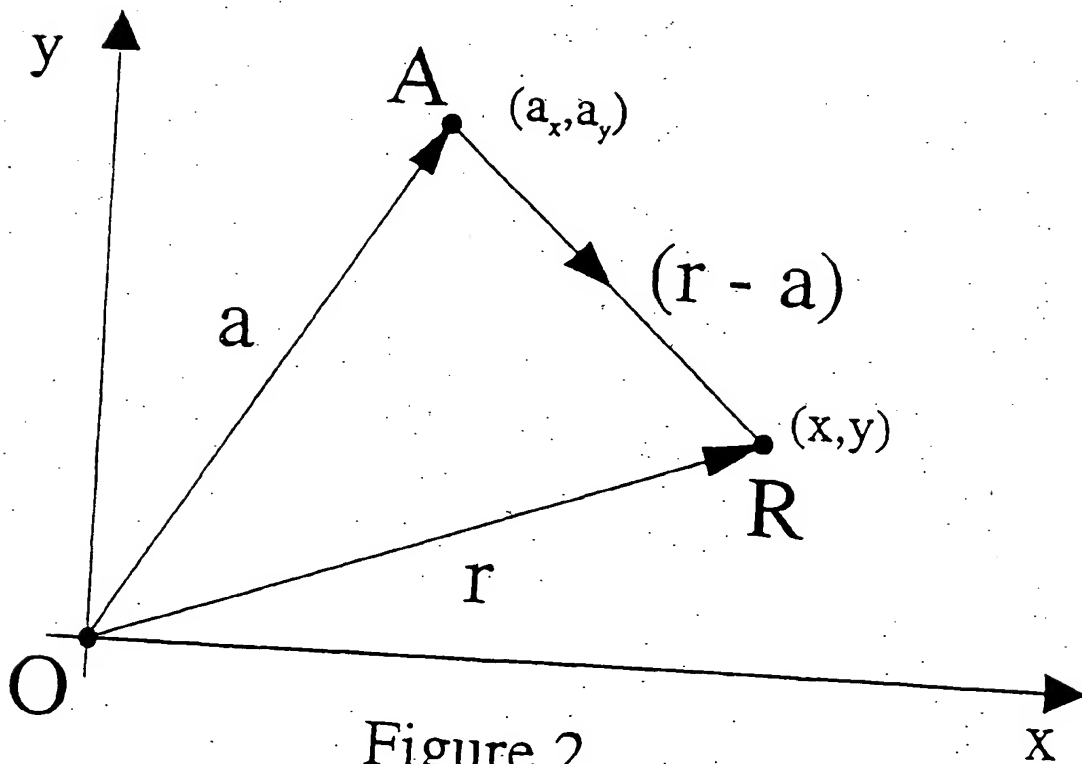


Figure 2